


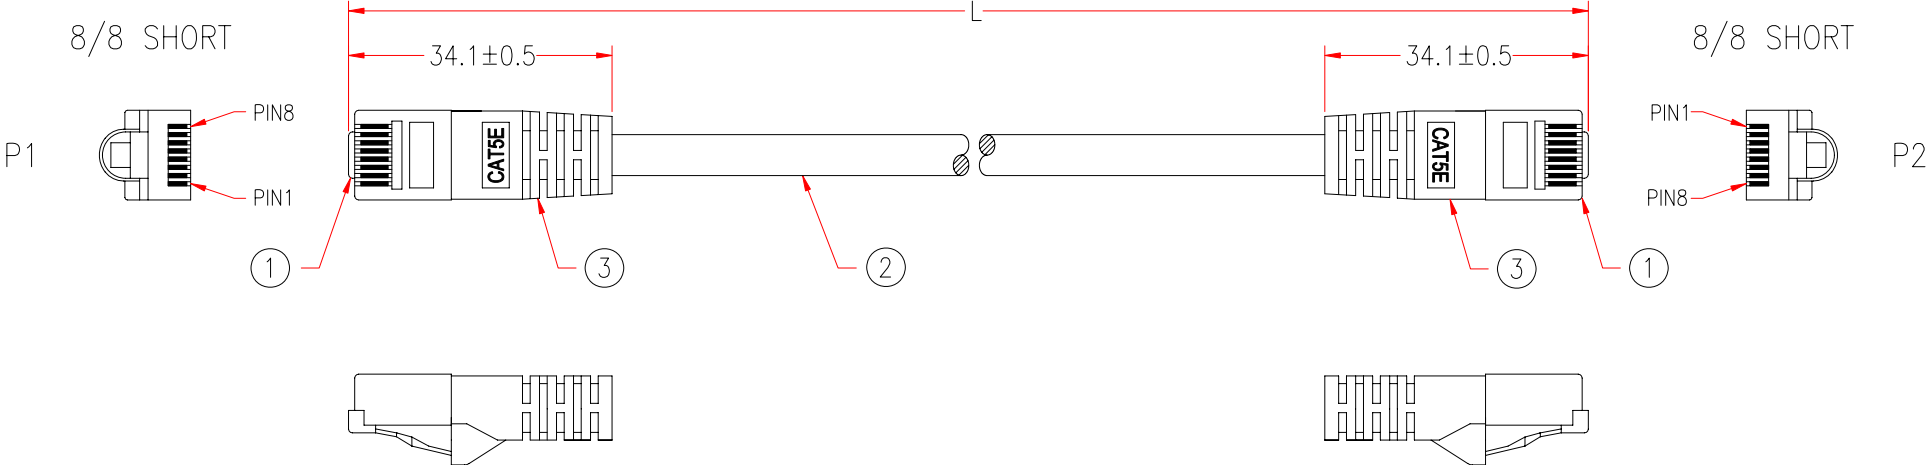

8148

P1		P2	
1		1	WHITE/ORANGE
2		2	ORANGE
3		3	WHITE/GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE/BLUE
7		7	WHITE/BROWN
8		8	BROWN

⚠ ⚠ * NOTE: All relevant materials are complied with RoHS directive .

3	MOLDED PVC BLACK	H1BP01-0304K07		M304
2	4 TWISD PAIRS CAT.5E 24AWG(7/0.19AS) UTP, OD 5.3mm, JACKET BLACK, DRAWING No. EU002404P-174	H5AH21-0304K07	L+10mm	M304
1	8P8C MODULAR PLUG, GOLD PLATING 50u" ON CONTACTS, SHORT TYPE	A1NA42-0208	2	M208
No.	DESCRIPTION		Q'TY	Supplier
APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	HU			
DRAWING	LIU			
DATE	21/APR/16	ITEM NO.	PC5E-XXF-YYY-S	UNIT:mm