



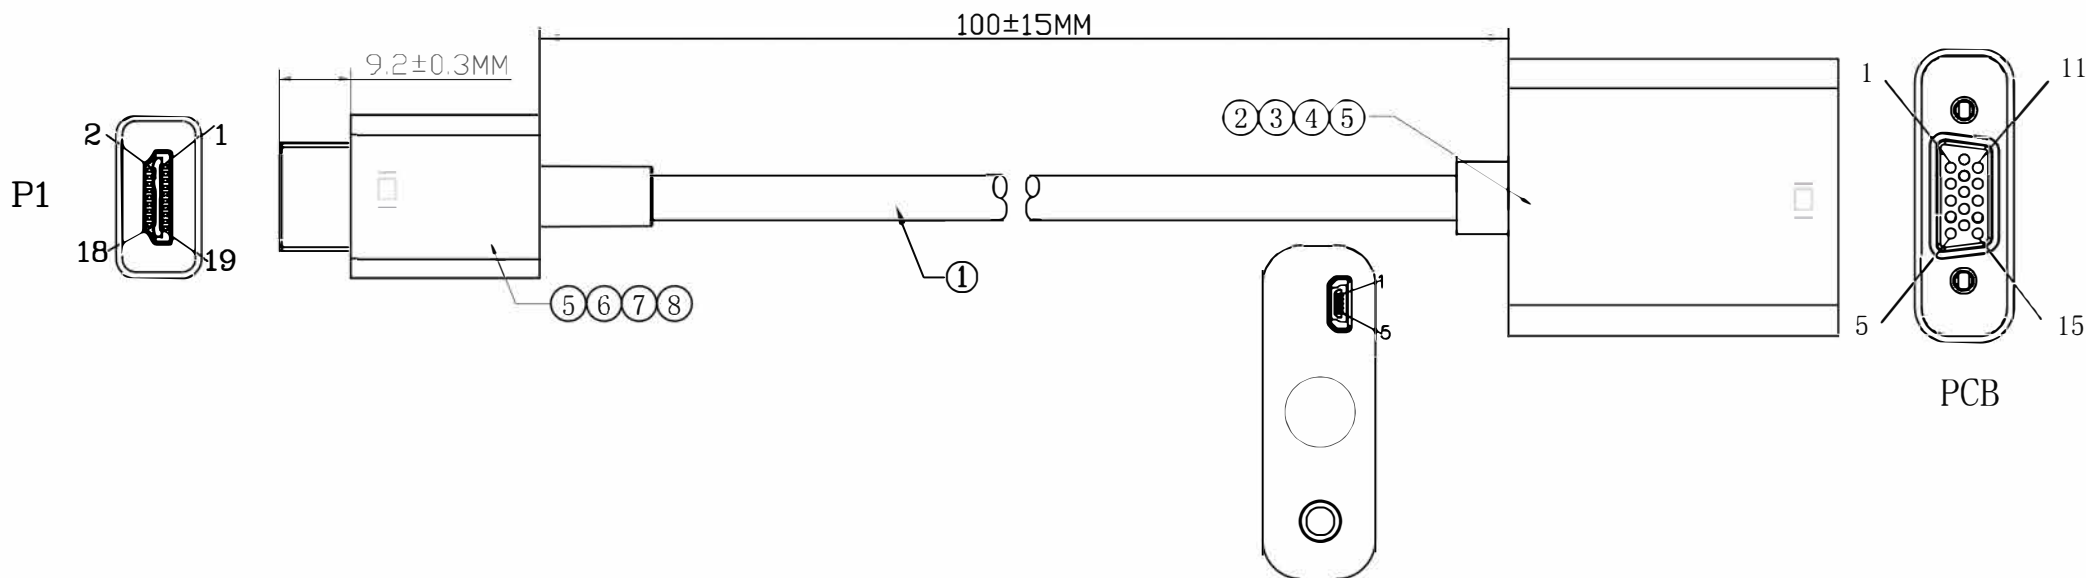

ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

PIN Assignment

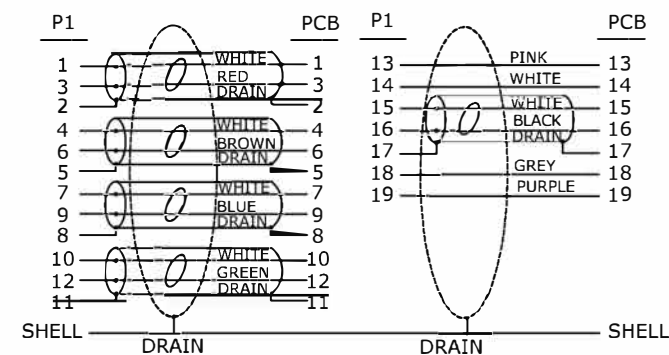

8	HDMI A/M ABS Shell Color:Black	1	pcs		TOLERANCE INCHES M/M				TITLE: HDMI to VGA Adapter			
7	HDMI A/M 19P Black Insulation Shell Gold Plated	1	pcs		.X		.015					.30
6	Transparent PE	5	g		.XX		.010					.10
5	45P PVC Color:Black	12	g		.XXX		.005					.05
4	VGA F ABS Shell Color:Black	1	pcs	DRAWN BY	Hong		CUSTOMER :					
3	#4-40UNC H4.75*8.6MM Nickel Plated Nut (H=4.8MM)	2	pcs				CUSTOMER P/N :					
2	HA-V with PCB Shell Gold Plated (IC:AG6200)	1	pcs	CHECK BY			SCALE	NONE	DRAWING NO.:	REV. AO		
1	Display Port UL20276[34AWG(7/0.06TC)*1P+EAM]*5C+32AWG(7/0.08TC)*5C +AEB (16/5/0.12MM 85%AL) OD:4.5MM Color:Black	0.15	pcs				UNIT	MM				
NO	DESCRIPTION	Q' TY	UNIT	APPD BY			DATE	2019.10.22	HDMIVGA-MF-ADPT			