


Items	Content Revised	Date
1		

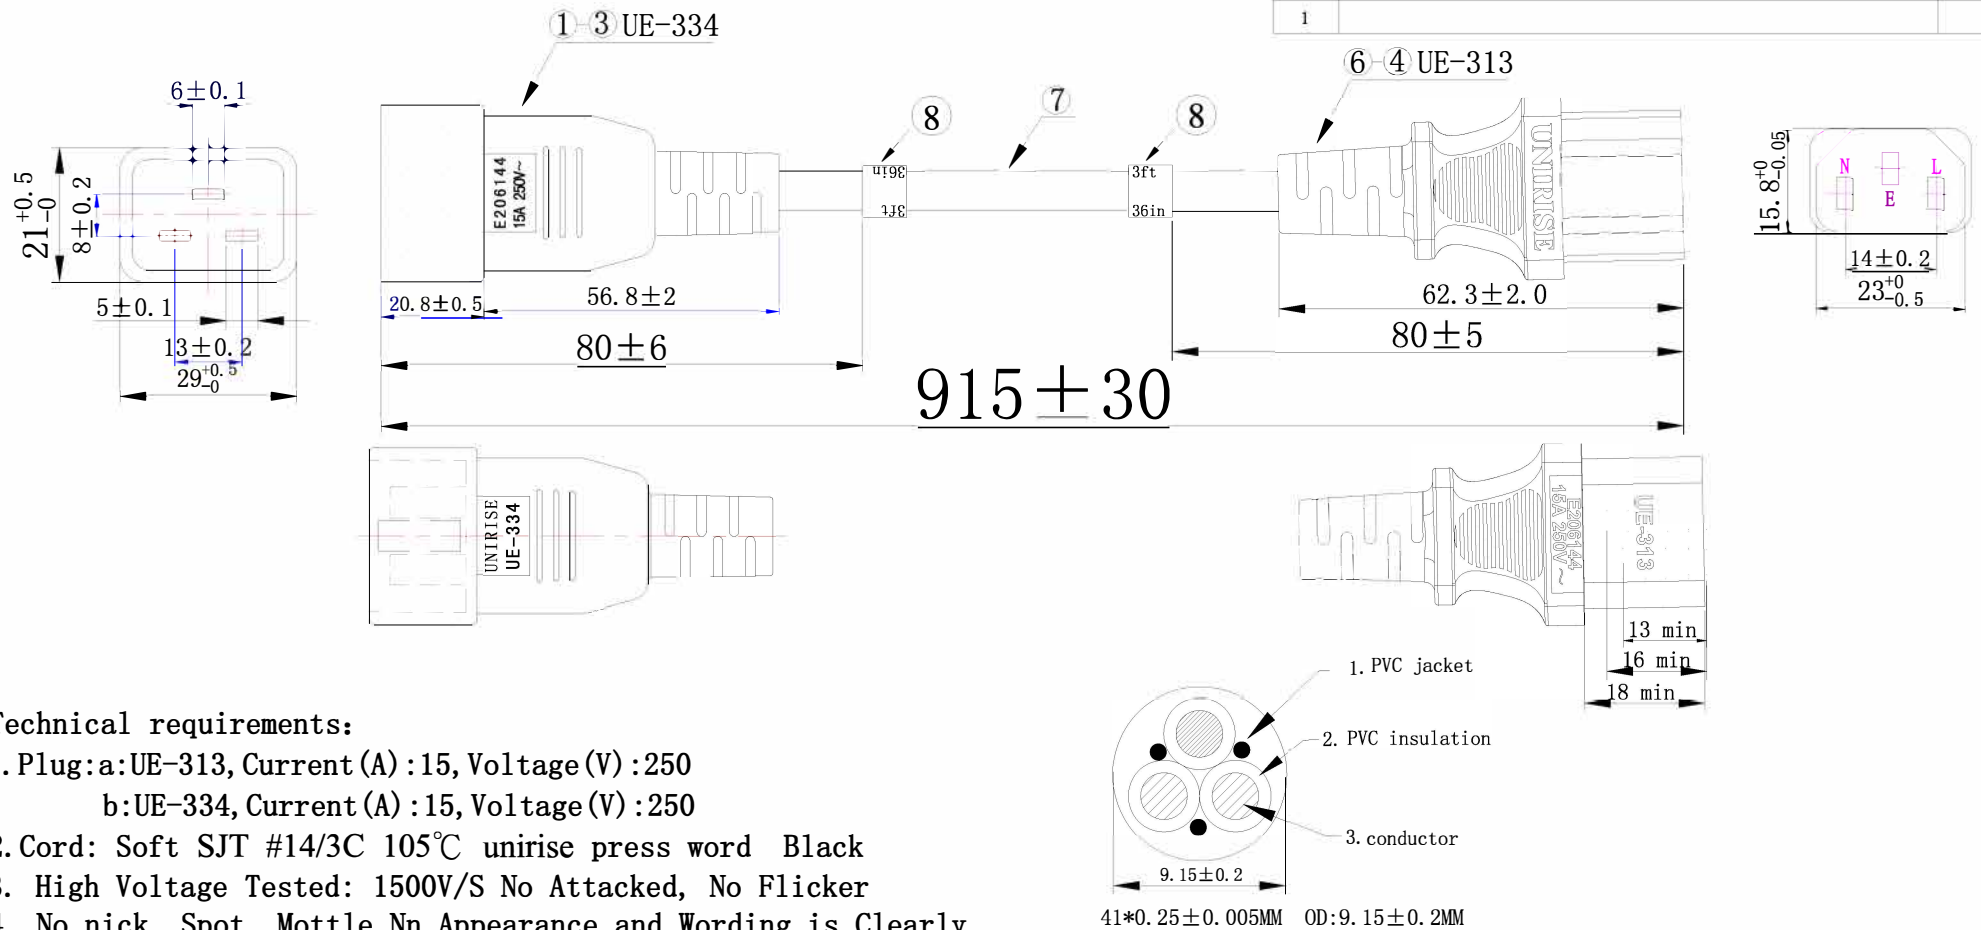

Technical requirements:

1. Plug: a: UE-313, Current (A) : 15, Voltage (V) : 250
b: UE-334, Current (A) : 15, Voltage (V) : 250
2. Cord: Soft SJT #14/3C 105°C unrise press word Black
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

BOM表

8	39005021	47x13mm PET Paster (3FT 36in)	2PCS	----
7	205353021008	SJT 14/3C 105°C Soft	1PCS	Black
6	306560000	PVC of plug 77A	/	Black
5	316313900	Inside Shelf (S8741PL-39)	1PCS	White
4	315313902	Blade of UE-313 (98740BS-0)	3PCS	----
3	306560000	PVC of plug 77A	/	Black
	315334901	2X6 E Blade of UE-334	1PCS	----
2	315334900	2X5 L/N Blade of UE-334	2PCS	----
1	316334000	UE-314 Inner frame	1PCS	Black
Items	Part Number	Description	Q' TY	Colour

CORD MARKING: E176096 (UL) SJT VW-1 105°C 300V 3x2.08mm² (14AWG)
Or C(UL) SJT FT1 105°C 300V 3x2.08mm² (14AWG) UNIRISE

CUSTOMER CONFIRM			
Drawing No.:PWCD-C13C20-15A-03F-BLK		Page:	Version:A
Power Supply Cord: UE-313+UE-334		Approved by:jason	
Customer :		Checked by:king	
Colour:Black		Drawn by : songyu	
Sample Part NO.. : XXX-004-2013		Unit :mm	Sheet : 